
TEN WORKS
INSPIRED FABRICATION

DATE // MAR 15, 2026 — JUN 30, 2026

PROJECT PROPOSAL

Wow moments. Extraordinary spaces. Inspired fabrication.

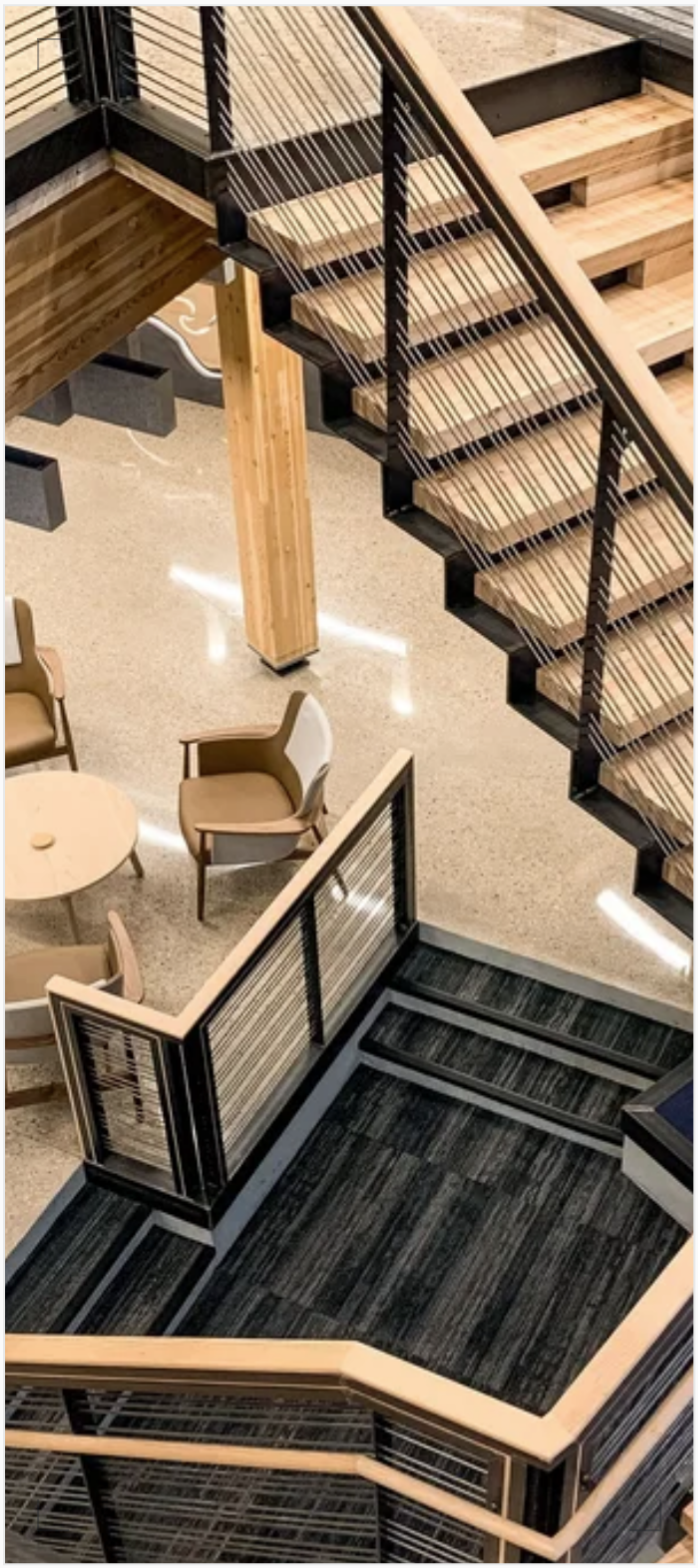

DRIVEN BY OUR VALUES

- COLLABORATION
- CREATIVE PRECISION
- INGENUITY
- COMMUNITY

PREPARED FOR

Key Construction

PREPARED BY

Chad Hershberger

TEN WORKS
INSPIRED FABRICATION

Dear Key Construction team,

Thank you for the opportunity to propose on the Main Street lobby and staircase package. Ten Works is prepared to deliver custom metal and wood fabrication that meets your schedule and quality standards.

This proposal outlines scope, deliverables, exclusions, and proposed costs. We have included a project timeline that aligns with your spring groundbreaking.

We look forward to discussing next steps.

Best regards,
Chad Hershberger
Ten Works

Scope includes design-assist for connection details, fabrication of steel stair structure and wood treads/risers, and metal rail/guard. All work per approved shop drawings. Finish: oak treads and risers with oil-based clear; steel with specified powder coat. Installation by Ten Works crew over two days with crane/staging as needed.

MATERIALS & FINISHES

MATERIAL / ITEM	FINISH
Structural steel	Prime + field paint per spec
Treads & risers	White oak, oil clear
Rail / baluster	Black powder coat

DELIVERABLES & SPECIFICATIONS

ITEM	DESCRIPTION / SPECS	QTY
Shop drawings	Stair and rail for approval	1
Steel submittal	Material certs and finish	1
Tread/riser mock-up	Finish sample on site	1
As-built	Final dimensions and photos	1

EXCLUSIONS (BY OTHERS)

- Site preparation and leveling
- Electrical hookups and permitting
- Concrete work at base
- Painting beyond prime on steel

MAIN ST LOBBY			
PRODUCT / DESCRIPTION	**QTY**	**UNIT PRICE**	**LINE TOTAL**
Custom steel stringers and tread supports	1	$18,500	$18,500
Oak treads and risers (finished)	24	$420	$10,080
Metal rail and baluster package	1	$9,200	$9,200
Delivery and staging	1	$850	$850
LOCATION TOTAL			**$38,630**

LANDING & GUARD			
PRODUCT / DESCRIPTION	**QTY**	**UNIT PRICE**	**LINE TOTAL**
Guard assembly (powder coat)	1	$3,400	$3,400
Installation (2 days)	1	$2,800	$2,800
LOCATION TOTAL			**$6,200**

PROJECT TOTAL	**$44,830**

TASK	START	END
Shop drawings approved	Mar 15, 2026	Mar 22, 2026
Material order / lead time	Mar 25, 2026	Apr 30, 2026
Fabrication	May 1, 2026	Jun 15, 2026
Delivery & install	Jun 20, 2026	Jun 30, 2026